



PROJECTOR LS921WU


Key Features

- 6,000 ANSI Lumens to deliver bright images up to 200" in size
- 2nd generation Laser Phosphor technology with a 20,000-hour lifespan
- 0.81-0.89 short throw ratio for minimal space consumption
- Wide H/V lens shift, 360° projection & portrait mode for flexible installation
- Dual HDMI 2.0b supporting 4K HDR/HLG content



Product Description

The LS921WU is an advanced 6,000 ANSI Lumens WUXGA short throw installation projector. Adopting 2nd generation Laser Phosphor technology, the LS921WU offers high and consistent brightness with a lifespan of 20,000 hours and a screen size of up to 200". Short throw ratio, 1.1x optical zoom, wide lens shift, 360° projection, and portrait mode combine for incredible flexibility to create a truly immersive experience, especially ideal for blending projection applications in restaurants, gyms, and simulation/experience centers. Dual HDMI 2.0b / HDCP 2.2 ports ensure access to original 4K quality content with HDR/HLG formats supported. Add to that the compact size and built-in HDBaseT for the perfect mix of high-quality projection and cost-effectiveness.

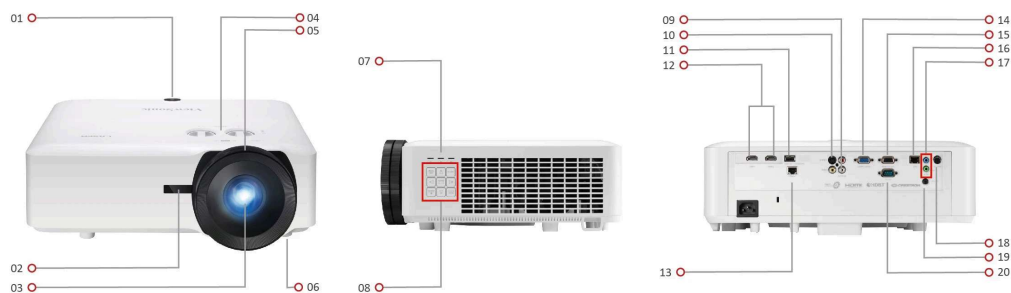

- | | | |
|----------------------------|-------------------------|--------------------|
| 1. Power Key & IR | 8. Keypad | 15. Monitor Out |
| 2. Front IR | 9. Composite | 16. LAN |
| 3. Lens | 10. S-Video | 17. Audio In & Out |
| 4. Lens Shift Control Knob | 11. USB Type A(5V/1.5A) | 18. 3D VESA |
| 5. Zoom/Focus Ring | 12. HDMI X 2 | 19. 12V OUT |
| 6. Adjustment Foot | 13. HDBaseT | 20. RS-232 |
| 7. LED Indicator | 14. Computer In | |

Visit Us

www.viewsonic.com

SPECIFICATION

Native Resolution:	1920x1200
Brightness:	6000 (ANSI Lumens)
Contrast Ratio:	3000000:1
Display Color:	1.07 Billion Colors
Light Source Type:	Laser Phosphor system
Light Source Life (hours) with Normal Mode:	20000
Light Source Life (hours) with SuperEco Mode:	30000 (Eco)
Lamp Watt:	Nichia 74W x2
Lens:	F=1.83-1.86, f=8.6-9.4mm
Projection Offset:	0%
Throw Ratio:	0.81-0.89
Optical Zoom:	1.1X
Digital Zoom:	0.8x-2.0x
Image Size:	60"-200"
Throw Distance:	1.04-3.83m (100"@1.74m)
Keystone:	H: +/-40° , V: +/-40°
Lens Shift V. Range:	+50%, -50%
Lens Shift H. Range:	+23%, -23%
Audible Noise (Normal):	36dB
Audible Noise (Eco):	29dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-135KHz
Vertical Scan Rate:	23-120Hz

INPUT

Computer in (share with component):	1
Composite:	1
S-Video:	1
HDMI:	2 (HDMI 2.0, HDCP 1.4/2.2)
Audio-in (3.5mm):	1
Audio-in (RCA R/L):	1
3D VESA (Sync):	1
HDBaseT:	1

OUTPUT

Monitor out:	1
Audio-out (3.5mm):	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 450W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	6.5
Gross Weight:	9
Dimensions (WxDxH) with Adjustment Foot:	405x305x145mm
Packing Dimensions:	515x490x276mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, total 23 languages
User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages

STANDARD ACCESSORY

Power Cord:	1
VGA Cable:	1
Remote Control:	1 (w/ laser pointer)
QSG:	Yes
Warranty Card:	Yes (CN Only)

OPTIONAL ACCESSORY

Wall/Ceiling Mount:	PJ-WMK-007
---------------------	------------

Speaker:	10W x2
USB Type A (Power):	1 (5V/ 1.5A)
12V Trigger (3.5mm):	1

CONTROL

RS232 (DB 9-pin male):	1
RJ45 (LAN control):	1
USB Type A (Services):	1 (share with USB A Output)