


Key Features

- Multi-tasking capabilities for enhanced lesson delivery
- •Embrace simplicity and organization with the USB-C one-cable solution, offering 65W of Power Delivery.
- Intuitive user interface and fast app launch for smooth operation
- Powered by Android 11



Product **Description**

The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

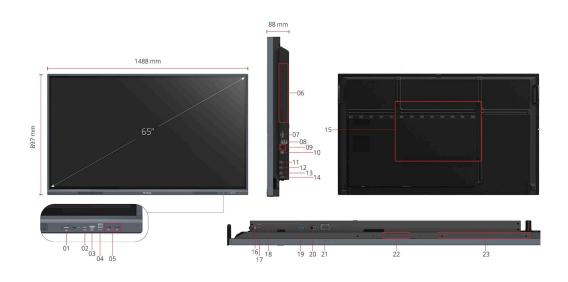

3. HDMI 1 4. TOUCH 1 5. USB 3.0x2 6. OPS Slot 7. RS-232 10. TOUCH 2 11. HDMI 2 12. HDMI 3 13. HDMI OUT 14. USB 17. AUDIO in 18. AUDIO out 19. VGA 20. Power On/OFF 21. AC IN

Visit Us

www.viewsonic.com

| n | ıc | D | | Λ | v |
|----|-----|---|---|---|---|
| IJ | 1.5 | μ | L | н | Y |

16W x 2

| DISPLAY | |
|--------------------|---|
| Panel Size: | 65" |
| Panel Type: | TFT LCD Module with DLED Backlight. IPS |
| Display Area (mm): | 1428.48(H) × 803.52(V) (64.5" diagonal) |
| Aspect Ratio: | 16:9 |
| Resolution: | UHD 3840x2160(Pixels) |
| Colors: | 1.07B colors |
| Brightness: | 350 nits |
| Contrast Ratio: | 5000:1 (max. with DCR enabled) |
| Response Time: | 8ms |
| Viewing Angles: | H=178, V=178 |
| Backlight Life: | 50,000 Hours (8 hours of use per day) |
| Surface Treatment: | Hardness: 7H Anti-glare coating |
| Orientation: | Landscape |
| PLATFORM | |
| Processor: | Quad-core ARM Cortex (A55*4) |
| RAM: | 8GB DDR4 |
| Storage: | 128 GB |
| TOUCH | |
| Type/ Tech: | Ultra Fine Touch Technology |
| Touch Point: | 40 points touch |
| INPUT | |
| HDMI: | HDMI-IN 2.0 x 3 (3840x2160 @60Hz) |
| RGB / VGA: | x1 |
| Audio: | x1 |
| RS232: | x1 |
| OPS: | x1 (Optional Intel Standard OPS) |
| WiFi: | x1 (Optional VB-WIFI-002/VB- WIFI-004/VSB-050) |
| OUTPUT | |
| HDMI: | HDMI 2.0 x1 |
| Audio: | x1 |
| SPDIF: | x1 |
| LAN | |
| RJ45: | x2 |
| USB | |
| Type A: | USB3.0:Front x2, Rear x2; USB2.0 x1 |
| Type B: | x2 (Rear x1 + Front x1) |
| Type C: | Front*1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing) |
| SPEAKERS | |
| 16\M x 2 | |

BUNDLE SOFTWARE

| Basic Annotation Software: | myViewBoard Whiteboard |
|----------------------------------|---|
| Pro Annotation Software: | myViewBoard for Windows (Embedded in optional Windows Slot-in PC) |
| Wireless Presentation: | myViewBoard Display |
| Wireless Presentation with Touch | Vos |

Feedback: Viewboard Cast: SPECIAL FEATURES

Simple LAN sharing between IFP and slot-in device: 10/100M for Android & Slot-in PC $^{10/100M}$

Light Sensor: Yes

POWER

| Voltage: | 100-240V AC |
|--------------|----------------------|
| Consumption: | On:99W : Off: ≤ 0.5W |

ERGONOMICS

| Wall Mount (VESA®): | 600*400 |
|----------------------|---------|
|----------------------|---------|

OPERATING CONDITIONS

| Temperature (° C): | 0°C to 40°C |
|--------------------|-----------------------------|
| Humidity: | 20% ~ 80% RH non-condensing |

DIMENSIONS (WXHXD)

| Physical (inch / mm): 1488 x 897 x 88 mm / 58.6 35.3 x 3.5 in |
|--|
|--|

Packaging (inch / mm): 1628x1005x208 mm / 64.1x 39.6x 8.2in

WEIGHT

Net (lb / kg): 77.1lb/34.95kg

Gross (lb / kg): 98.5 lb/44.7kg

REGULATIONS

FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM, & RoHS DoC, ErP, REACH SVHC List, & DoC, EEL, WEEE, BSMI,BIS

PACKAGE CONTENTS

1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) 5. Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMl cable 3m

COMPATIBLE SLOT-IN PC

VPC2-O series/VPC2-O-1B series/VPC12-WPO-15/16

TOP CAMERA PLATE

Yes

EMBEDDED OS

Android 11

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.